


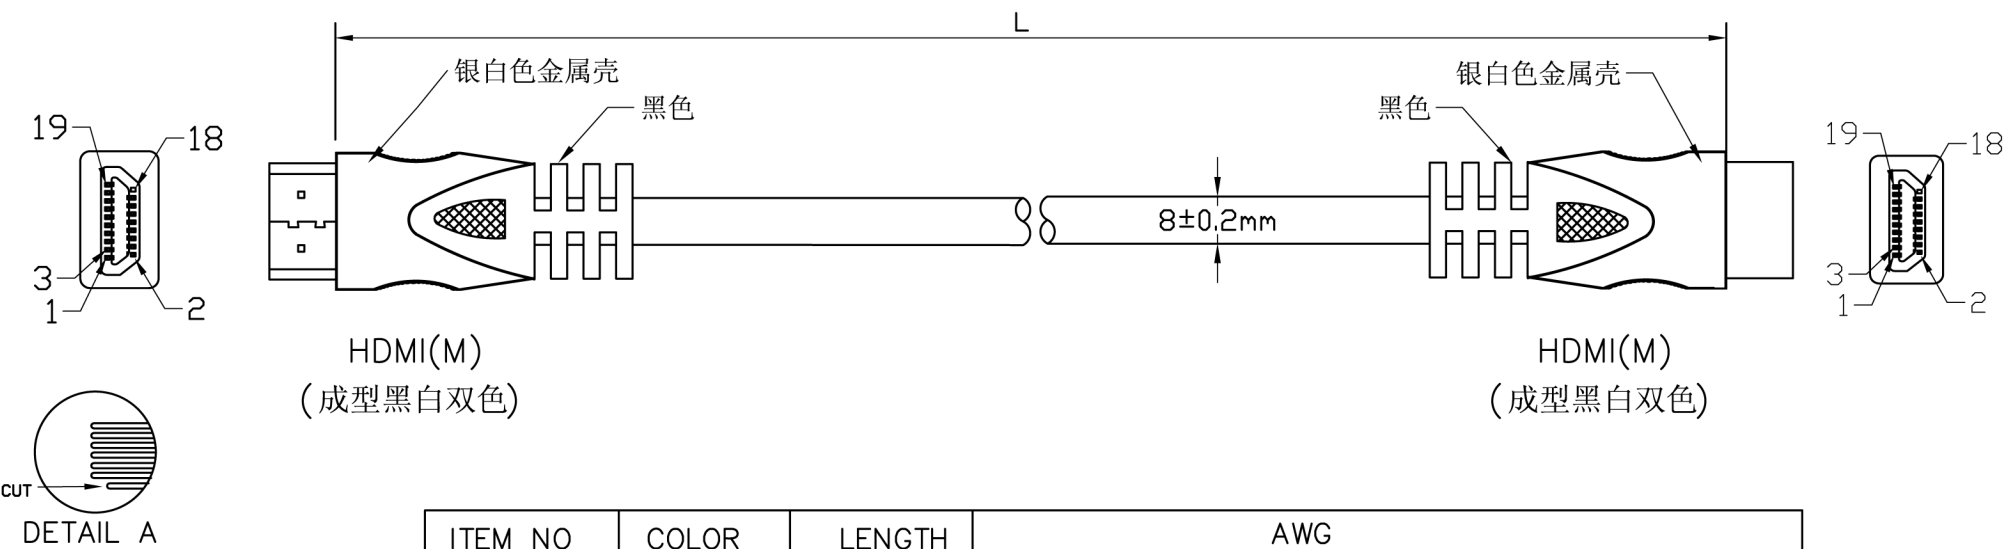

ITEM NO	COLOR	LENGTH	AWG
CDLHD-310	BLACK	10M	(#26*1P+D+FAM)*4PCS+#28*1P+#28*5C,OD=8.0MM
CDLHD-315	BLACK	15M	(#24*1P+D+FAM)*4PCS+#26*1P+#26*5C,OD=9.5MM
CDLHD-320	BLACK	20M	(#22*1P+D+FAM)*4PCS+#24*1P+#24*5C,OD=11.8MM

NOTE: 包装方式: 空白OPP袋 (无表头) +3*2CM料号叙述贴纸+垃圾筒贴纸

1. CABLE: 26AWG,UL20276,AL+B-FOIL,[(#26*1P+D+FAM)*4PCS+#28*1P+#28*5C]+AM+B,
BLACK COLOR,OD=8.0mm,PVC JACKET(Aluminum hood+plastic,double shielded).

2. LENGTH. L
3. CONNECTORS: HDMI19P(M)*2PCS(BLACK INSULATOR).(镀金头)
4. MOLD: MOLDING TYPE.
5. CONTACTS:

HDMI(M)	1	3	2	4	6	5	7	9	8	10	12	11	13	14	18	19	17	15	16	64
HDMI(M)	1	3	2	4	6	5	7	9	8	10	12	11	13	14	18	19	17	15	16	64
	PAIR		G	PAIR		G	PAIR		G	PAIR		G	5C			PAIR			SHELL	

6. OPEN/SHORT TEST:100% TEST.
INSULATION: MIN. 2M.
7. ALL MUST BE RoHS COMPLIANT.

COMPANY	CDL		ITEM NO.	CDLHD-310	NO				SCALE		
REVISION	DATE	DISCRIPTION	DRAWN BY						UNIT(mm)		
REV.A/3	2010.04.26		DESIGNED BY						DRAWING NO.		
REV.A/4	2010.09.16		APPROVAL BY								
REV.A/2	2009.08.27										